


BE8/10KW-1PH

HYBRID INVERTER



- ✓ Up to 200% oversizing with 3 MPPTs.
- ✓ Stackable up to 9 units; generator compatible.
- ✓ Supports 40–64V batteries with 210A charge/discharge.
- ✓ 110% continuous output and <10 ms backup transition.

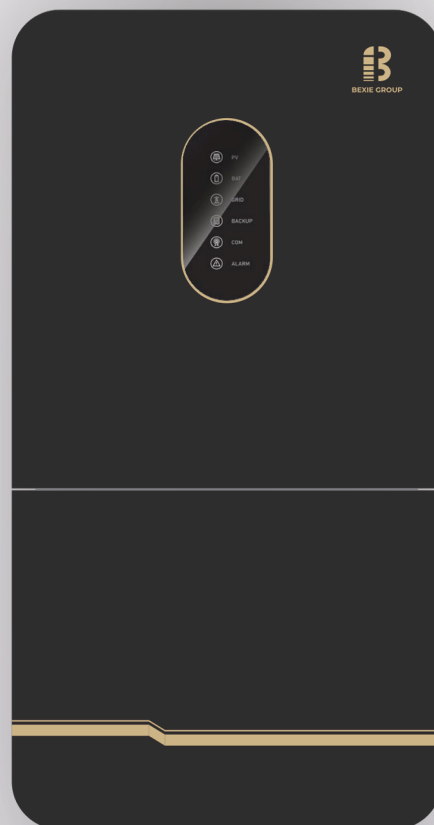

+34 985 194 232



www.bexieenergy.com



Calle Peña Santa 68, Polígono Industrial
Silvota, 33192, Llanera, Asturias



BE8/10KW-1PH

HYBRID INVERTER

Model	BE8KW-1PH	BE10KW-1PH
Efficiency		
Max. Efficiency (PV to AC)	98.0%	
Max. Efficiency (BAT to AC)	94.5%	
Input (PV)		
Max. PV Input Power	12,000W	15,000W
Max. PV Voltage	600V	
Start-up Voltage	90V	
MPPT Operating Voltage Range	70V-540V	
Max. Input Current per MPPT	30A/22A/22A	
Max. Short Circuit Current per MPPT	40A/30A/30A	
String per MPPT	2/2/2	
Nos. of MPPT	3	
Input/Output (BAT)		
Battery Type	Lithium-ion/Lead-acid	
Nominal Battery Voltage	48V	
Battery Voltage Range	40V-64V	
Max. Charge/Discharge Current	210A/180A	210A/210A
Max. Charge/Discharge Power	10,000W/8,000W	10,000W/10,000W
Output (Grid)		
Nominal AC Output Power	8,000W	10,000W
Max. AC Output Apparent Power	8,800VA	11,000VA
Max. AC Output Power (PF=1)	8,800W	11,000W
Max. AC Output Current	40A	50A
Nominal Grid Voltage	220V/230/240V, L+N+PE	
Grid Voltage Range	150V-300V (Adjustable)	
Nominal Grid Frequency	50Hz/60Hz	
Grid Frequency Range	45Hz-55Hz/55Hz-65Hz (Adjustable)	
Power Factor	>0.99 @rated power (Adjustable 0.8 LD - 0.8 LG)	
THDI	<3% (Rated Power)	



+34 985 194 232



www.bexieenergy.com



Calle Peña Santa 68, Polígono Industrial
Silvota, 33192, Llanera, Asturias



BE8/10KW-1PH

HYBRID INVERTER

Model	BE8KW-1PH	BE10KW-1PH
Output (Back up)		
Nominal Output Power	8,000W	10,000W
Nominal Output Current	34.8A	43.5A
Peak Output Apparent Power (Is)	16,000VA	20,000VA
Nominal Output Voltage	220V/230/240V, L+N+PE	
Nominal Output Frequency	50Hz/60Hz	
Transfer Time	<10ms (typical)	
THDV	<3% @100% R Load	
Protection		
Protection Category	Class I	
DC Switch	Yes	
Anti-islanding Protection	Yes	
AC Overcurrent Protection	Yes	
DC/AC Overvoltage Protection	DC Type II, AC Type III	
AC Short Circuit Protection	Yes	
DC Reverse Protection	Yes	
Surge Arrester	DC Type II, AC Type II	
Insulation Resistance Detection	Yes	
Leakage Current Protection	Yes	
AFCI	Optional	
Generator	Yes	
Certification		
Safety	IEC 62109-1&2	
Grid	IEC 61727/62116, AS 4777.2, NRS 097-2-1	
Warranty	10 Years	
HMI & COM		
Display	Bluetooth & APP + LED , LCD (optional)	
Communication Interface	RS485/CAN (for BMS), DRM/RS485 (for Meter), RS485, Optional: Wi-Fi/LAN	



+34 985 194 232



www.bexieenergy.com



Calle Peña Santa 68, Polígono Industrial
Silvota, 33192, Llanera, Asturias



BE8/10KW-1PH

HYBRID INVERTER

Model

BE8KW-1PH

BE10KW-1PH

General

Max. Operation Altitude	4000m (>2000m derating)
Ingress Protection Degree	IP66
Operating Temperature Range	-25°C~60°C (>45°C derating)
Relative Humidity	0~100%
Cooling	Fan Cooling
Mounting	Wall bracket
Dimensions (W*H*D)	420mm*800mm*240mm
Weight	39Kg
PV Connection Way	Terminals



+34 985 194 232



www.bexieenergy.com



Calle Peña Santa 68, Polígono Industrial
Silvota, 33192, Llanera, Asturias